

Dongfeng Cummins

Technical

Operations



ENGINE MODEL: 6CTA8.3-GM175
CURVE & DATASHEET: FR92184

REV 00 15APR2009



Generator Engine Performance Data

DONGFENG CUMMINS ENGINE Co.,LTD

Xiangfan, Hubei Province, China
<http://www.dcec.com.cn>

Basic Engine Model:

6CTA8.3-GM175

FR92184

175 kW @ 1800 RPM

Configuration D413065MX03	CPL Code CPL:2337	Revision 2009-4-15
-------------------------------------	-----------------------------	------------------------------


Compression Ratio:	17.3:1	Aspiration:	Turbocharged & Aftercooled
Bore:	114 mm	Displacement:	8.3 L
Stroke:	135 mm	No. of Cylinders:	6
Governor Regulation:	≤3%	Fuel System:	BYC P7100/GAC 24V

All data is based on the engine operating with fuel system, water pump, and 10 in H₂O (2.488 kPa) inlet air restriction with 5.98 in (152mm) inner diameter, and with 2.01 in Hg (7 kPa) exhaust restriction with 4.02 in (102 mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolants as 50% ethylene glycol/50% water. All data is subject to change without notice.

Engine Speed RPM	Standby Power		Prime Power		Continuous Power	
	kW	HP	kW	HP	kW	HP
1800	193	259	175	235	144	193

Engine Performance Data @ 1800 RPM

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
STANDBY POWER				
100	193	259	218	51
PRIME POWER				
100	175	235	215	46
75	131	176	212	34
50	87.5	117	224	24
25	44	59	265	14
CONTINUOUS POWER				
100	144	193	213	37

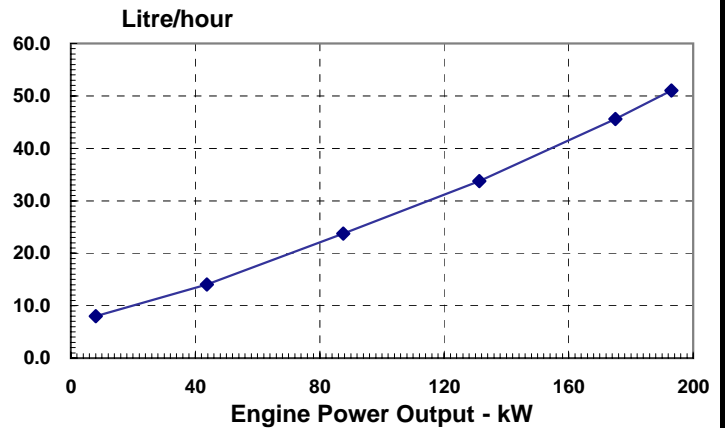

Engine Performance Data @ 1500 RPM

Not Available at 1500 RPM

Not Available at 1500 RPM

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 conditions of 100kPa (29.61 in. Hg) barometric pressure [80 m (263 ft.) altitude], 25°C (77°F) inlet air temperature, and 1 kPa (0.30 in. Hg) water vapor pressure with No.0# diesel fuel.

GENERAL ENGINE DATA

Weight (Dry) Engine only - Average.....	-kg	637
Idle Speed Setting.....	-rpm	750-850
Compression Ratio		17.3:1
Piston Speed*	-m/sec	8.1
Firing Order.....		1-5-3-6-2-4

ENGINE MOUNTING

Maximum (Static) Bending Moment at Rear Face of Block.....	-N•m	1356
--	------	------

EXHAUST SYSTEM*

Maximum Back Pressure.....	-kPa	10.1
Exhaust Gas Flow.....	-litre/sec	TBD
Exhaust Gas Temperature Turbine Out (Rated Power).....	-°C	507
Exhaust Pipe Size Normally Acceptable.....	-mm	75
Maximum Static Supported Weight at the Turbocharger Outlet Flange.....	-N•m	22.7

AIR INTAKE SYSTEM*

Maximum Intake Air Restriction with Heavy Duty Air Cleaner		
— Dirty Element.....	-kPa	6
— Clean Element.....	-kPa	4
Minimum Dirt Holding Capacity with Heavy Duty Air Cleaner.....	-g/cfm	53
Maximum Temperature Rise from Ambient to the Inlet of the Turbocharger.....	-°C	17
Intake Manifold Pressure	-kPa	120
Intake Air Flow*.....	-kg/hr	TBD
Heat Rejection to Ambient	-kW	TBD
Recommended intake piping size (inner diameter).....	-mm	75

FUEL SYSTEM*

Maximum Fuel Flow on the Supply Side of the Fuel Pump.....	-litre/hr	259
Maximum fuel supply restriction at fuel pump inlet		
— with clean fuel filter element(s) at maximum fuel flow.....	-kPa	8
— with dirty fuel filter element(s) at maximum fuel flow	-kPa	14
Maximum fuel inlet temperature.....	-°C	60
Maximum Allowable Return Line Pressure	-kPa	69

LUBRICATION SYSTEM

Normal Operating Oil Pressure Range		
— minimum low idle.....	-kPa	103
— rated speed (Min/Max).....	-kPa	276 - 414
Maximum Sump Oil Temperature.....	-°C	121
Minimum Required Lube System Capacity - Sump plus Filters.....	-litre	19
By-pass Filtration Required.....	-Yes/No	Yes

COOLING SYSTEM*

Coolant capacity - engine only.....	-litre	12.3
Minimum Coolant Makeup Capacity	-litre	3
Standard (modulating) Thermostat Range.....	-°C	82-95
Minimum pressure cap rating at sea level.....	-kPa	69
Maximum coolant operating temperature at engine outlet (max. top tank temp):.....	-°C	96
Minimum operating block coolant temperature.....	-°C	79.4
Minimum coolant expansion space (% of system capacity).....	- %	5
Heat Rejection to Coolant.....	-kW	TBD
Maximum recommended external coolant flow restriction in engine circuit:.....	-kPa	35

CRANKING SYSTEM

Minimum Battery Capacity - Cold Soak at 0°F (-18°C) or Above		12V	24V
— Engine Only - Cold Cranking Amperes.....	-CCA	1500	750
— Engine Only - Reserve Capacity.....	-min.	360	180
Maximum Starting Circuit Voltage Drop.....	-Volts	TBD	
Minimum Ambient Temperature for Unaided Cold Start.....	-°C(°F)	-12	(10)
Minimum Cranking Speed Required for Unaided Cold Start.....	-rpm	120	
Maximum starting circuit resistance.....	-Ohm	0.00075	0.002

EMISSIONS DATA (in accordance with ISO8178 Cycle D2)

NO _x (Oxides of Nitrogen).....	-g/kW.h	TBD
---	---------	-----

*All Data at Rated Conditions

ALL DATA CERTIFIED WITHIN 5%

TBD = To Be Decided

N/A = Not Applicable

N.A. = Not Available

All data is subject to change without notice, sorry for inform.

Dongfeng Cummins Engine Co., Ltd.