

Dongfeng Cummins Technical Operations



ENGINE MODEL: 6LTAA8.9-GM200
CURVE & DATASHEET: FR92710

REV 00 15APR2009



Generator Engine Performance Data

DONGFENG CUMMINS ENGINE Co.,LTD

Xiangfan, Hubei Province, China
<http://www.dcec.com.cn>

Basic Engine Model:

6LTAA8.9-GM200

FR92710

200kW @ 1500 RPM

Configuration D563014MX03	CPL Code CPL:2724	Revision 2009-4-15
-------------------------------------	-----------------------------	------------------------------


Compression Ratio:	16.6:1	Aspiration:	Turbocharged and Charge Air Cooled
Bore:	114 mm	Displacement:	8.9 L
Stroke:	145 mm	No. of Cylinders:	6
Emission Certification:	CCS IMO	Fuel System:	BYC P7100/GAC 24V
Governor Regulation:	≤3%		

All data is based on the engine operating with fuel system, water pump, and 10 in H₂O (2.488 kPa) inlet air restriction with 5.98 in (152mm) inner diameter, and with 2.01 in Hg (7 kPa) exhaust restriction with 4.02 in (102 mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolants as 50% ethylene glycol/50% water. All data is subject to change without notice.

Engine Speed RPM	Standby Power		Prime Power		Continuous Power	
	kW	HP	kW	HP	kW	HP
1500	220	295	200	268	175	235

Engine Performance Data @ 1500 RPM

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
STANDBY POWER				
100	220	295	206	55
PRIME POWER				
100	200	268	205	50
75	150	201	206	37
50	100	134	211	26
25	50	67	231	14
CONTINUOUS POWER				
100	175	235	205	43

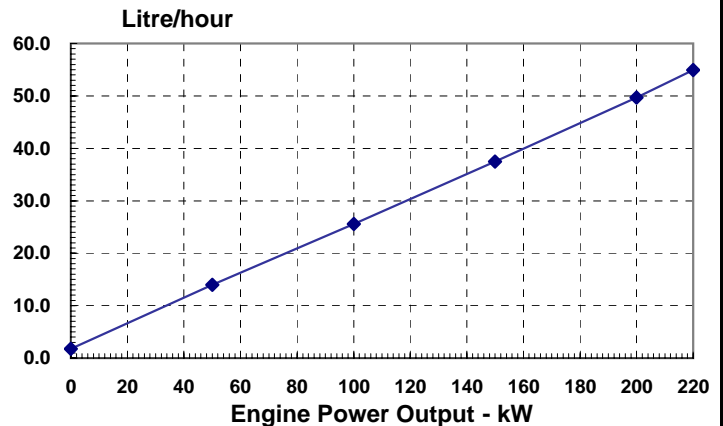

Engine Performance Data @ 1800 RPM

Not Available at 1800 RPM

Not Available at 1800 RPM

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 conditions of 100kPa (29.61 in. Hg) barometric pressure [80 m (263 ft.) altitude], 25°C (77°F) inlet air temperature, and 1 kPa (0.30 in. Hg) water vapor pressure with No.0# diesel fuel.

GENERAL ENGINE DATA

Weight (Dry) Engine only - Average.....	-kg	650
Idle Speed Setting.....	-rpm	1000±50
Compression Ratio		16.6:1
Piston Speed*	-m/sec	7.25
Firing Order.....		1-5-3-6-2-4

ENGINE MOUNTING

Maximum (Static) Bending Moment at Rear Face of Block.....	-N•m	1356
------------------------------------------------------------	------	------

EXHAUST SYSTEM*

Maximum Back Pressure.....	-kPa	10.1
Exhaust Gas Flow.....	-litre/sec	TBD
Exhaust Gas Temperature Turbine Out (Rated Power).....	-°C	410
Exhaust Gas Temperature Turbine Out (Standby Power).....	-°C	450
Exhaust Pipe Size Normally Acceptable.....	-mm	100
Maximum Static Supported Weight at the Turbocharger Outlet Flange.....	-N•m	14

AIR INTAKE SYSTEM*

Maximum Intake Air Restriction with Heavy Duty Air Cleaner		
— Dirty Element.....	-kPa	6
— Clean Element.....	-kPa	4
Minimum Dirt Holding Capacity with Heavy Duty Air Cleaner.....	-g/cfm	53
Maximum Temperature Rise from Ambient to the Inlet of the Turbocharger.....	-°C	17
Intake Manifold Pressure	-kPa	178
Intake Air Flow*.....	-litre/sec	TBD
Heat Rejection to Ambient	-kW	TBD
Recommended intake piping size (inner diameter).....	-mm	125

CHARGE AIR COOLING SYSTEM*

Maximum allowable pressure drop across charge air cooler and OEM CAC piping (IMPD):.....		
	-kPa	14
Maximum Intake Manifold Temperature Differential (Ambient to IMT) (IMTD):.....	-°C	35
Intake manifold temperature for Fan-ON.....	-°C	60

FUEL SYSTEM*

Maximum Fuel Flow on the Supply Side of the Fuel Pump.....	-litre/hr	300
Maximum fuel supply restriction at fuel pump inlet		
— with clean fuel filter element(s) at maximum fuel flow.....	-kPa	8
— with dirty fuel filter element(s) at maximum fuel flow	-kPa	14
Maximum fuel inlet temperature.....	-°C	60
Maximum Allowable Return Line Pressure	-kPa	34

LUBRICATION SYSTEM

Normal Operating Oil Pressure Range		
— minimum low idle.....	-kPa	179
— rated speed (Min/Max).....	-kPa	350/490
Maximum Sump Oil Temperature.....	-°C	121
Minimum Required Lube System Capacity - Sump plus Filters.....	-litre	27.6
By-pass Filtration Required.....	-Yes/No	Yes

COOLING SYSTEM*

Coolant capacity - engine only.....	-litre	11.1
Minimum Coolant Makeup Capacity	-litre	3
Standard (modulating) Thermostat Range.....	-°C	82-93
Minimum pressure cap rating at sea level.....	-kPa	50
Maximum coolant operating temperature at engine outlet (max. top tank temp):.....	-°C	96
Minimum operating block coolant temperature.....	-°C	71
Minimum coolant expansion space (% of system capacity).....	- %	6
Heat Rejection to Coolant.....	-kW	TBD
Maximum recommended external coolant flow restriction in engine circuit:.....	-kPa	34

CRANKING SYSTEM

Minimum Battery Capacity - Cold Soak at 0°F (-18°C) or Above		12V	24V
— Engine Only - Cold Cranking Amperes.....	-CCA	1500	750
— Engine Only - Reserve Capacity.....	-min.	360	180
Maximum Starting Circuit Voltage Drop.....	-Volts	TBD	
Minimum Ambient Temperature for Unaided Cold Start.....	-°C(°F)	-12	(10)
Minimum Cranking Speed Required for Unaided Cold Start.....	-rpm	150	
Maximum starting circuit resistance.....	-Ohm	0.00075	0.002

EMISSIONS DATA (in accordance with ISO8178 Cycle D2)

NO _x (Oxides of Nitrogen).....	-g/kW.h	TBD
-------------------------------------------	---------	-----

*All Data at Rated Conditions

ALL DATA CERTIFIED WITHIN 5%

TBD = To Be Decided

N/A = Not Applicable

N.A. = Not Available

All data is subject to change without notice, sorry for inform.

Dongfeng Cummins Engine Co., Ltd.